


# HI-RIB

 INTERLINE PRODUCTS

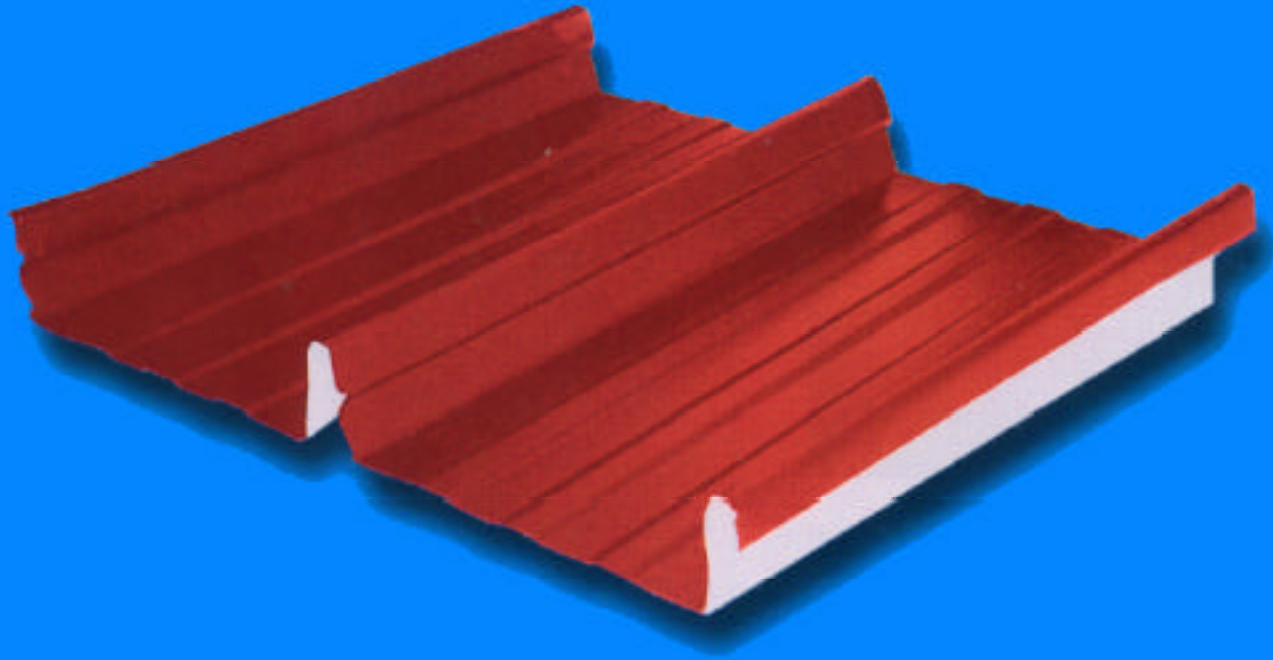


Versatility,  
Lightness and Strength

Interline HI-RIB high tensile sheeting, offers versatility, rigidity, strength and easy installation. The HI-RIB provides a weather proof seal for roofs pitched as low as 1°. Installation of HI-RIB roof sheets does not require any piercing of fasteners through the sheet. The HI-RIB roof is aesthetically pleasing and fool proof against any water leakage.



HI-RIB is cold roll-formed, using grade G550 steel (550 MPa minimum yield stress), with a total coated thicknesses of 0.53 and 0.65mm. HI-RIB sheeting comes in a choice of three durable and practical surface finishes: Colourstrong®, PVF<sup>2</sup> and Galvalume®. Using a base steel coated with an aluminium zinc alloy (AZ150). HI-RIB offers an unbeatable combination of strength and quality with these finishes. Colourstrong® and PVF<sup>2</sup> come in Golden Yellow, Vermillion Red, Jade Green, Light Brown, Military Green, Off White and Kelabu Grey (\*some colours and finishes are only available upon special order).

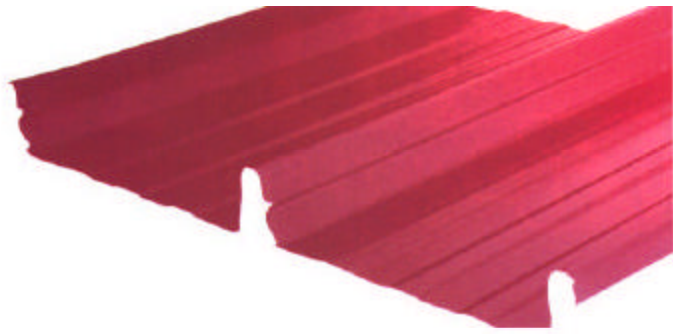

**ROOF PITCH** - Minimum roof pitch 1°

**LENGTHS** - HI-RIB can be factory rolled and cut to any customer specified length. Length is only limited by transport limitations.

**TOLERANCES** - Per unit length =  $\pm 12\text{mm}$   
Cover width  $500 \pm 2\text{mm}$

*For further technical details, please refer to 'HI-RIB Technical Data Sheet'.*



**INTERLINE (B) SDN. BHD.**

**YOUR LOCAL DISTRIBUTOR**

Lot 56, 57, 58 & 59, Beribi Industrial Complex II, Gadong BE1118  
Gadong P. O. Box 520, Bandar Seri Begawan BE3978, Negara Brunei Darussalam  
Tel No. 673-2-448721 - 4 Fax No. 6732-448725  
E-mail: info@interline-asia.com Website: www.interline-asia.com