


INTERDEK
INTERLINE PRODUCTS



**Versatility,
Lightness and Strength**

Interline INTERDEK high tensile sheeting offers versatility, rigidity, lightness and strength. Applications include roof and wall cladding for industrial and residential buildings, home renovations, extensions, garages, carports and enclosed patios and fencing.

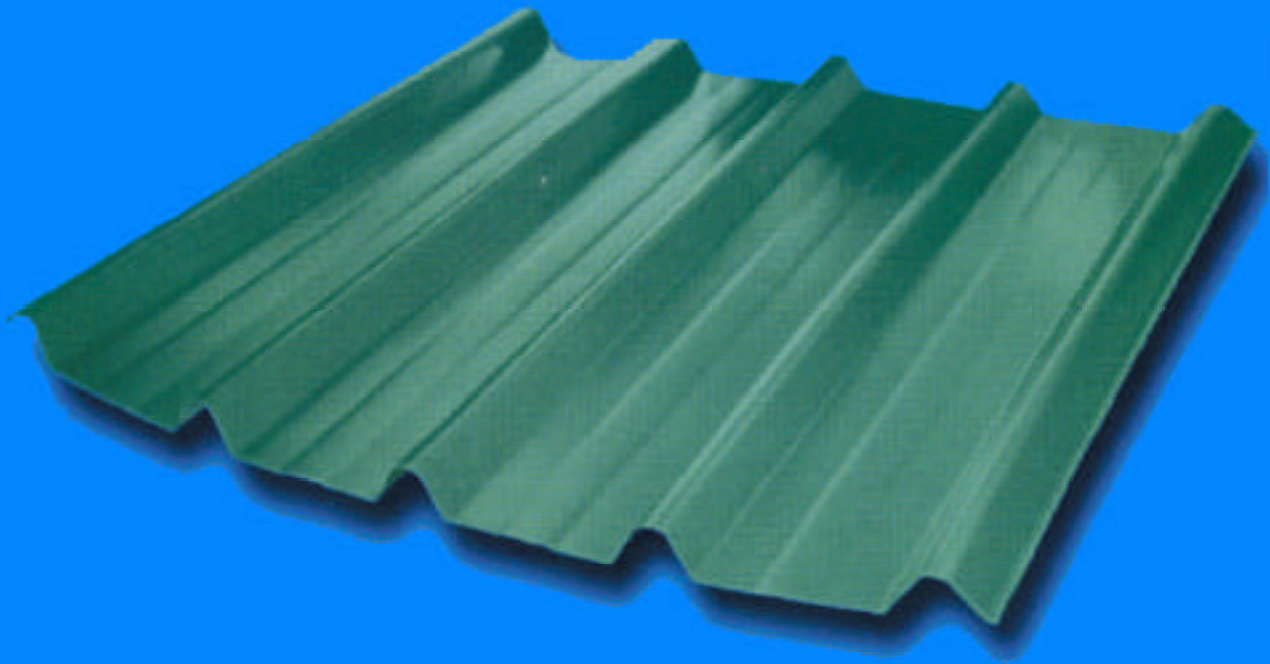

INTERDEK sheeting is cold roll-formed, using steel grade range from G340 to G550 with a total coated thickness of 0.3mm, 0.40mm, 0.47mm and 0.62mm. The sheeting comes in a choice of 4 surface finishes: Regular Polyester (PE), Silicon Modified Polyester (SMP), Polyvinylidene Fluoride (PVF2) and non-painted Galvalume. All base steel are coated with choices of aluminium, zinc or zinc galvanized. PE, SMP and PVF2 comes in 11 colour choices, that is Golden Yellow, Military Green, Light Brown, Jade Green, Off White, Kelabu Grey, Vermillion Red, Royal Blue, Aqua Green, Forest Green and Teak Brown.

SHEET LAYING

Sheets should be lifted onto the roof the right way up, with either the male or female ribs facing the same direction.


END LAPPING

When two or more sheets are required for full length cover, start laying at the gutter and work up to the ridge and then start the next run. The minimum end laps required are:

Roofs - Pitch up to 15° - 230mm
Pitch over 15° - 150mm

Walls - 100mm

End laps in roofs with a pitch of less than 5° (1 in 12) are to be sealed. End laps must be positioned over a support and the support spacings either side are to be those recommended for an end span.

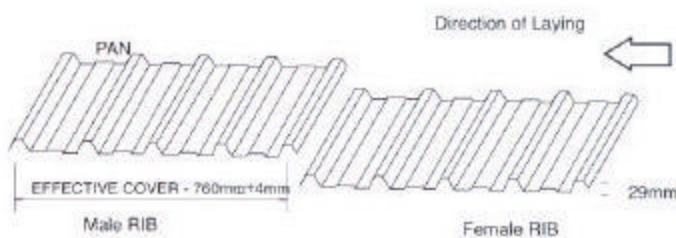

- ROOF PITCH** - Minimum roof pitch is 3°
- LENGTHS** - INTERDEK can be factory rolled and cut to any customer specified length. Length is only restricted by transport limitations.
- TOLERANCES** - Per unit length ± 12 mm
Cover Width - 760 ± 4 mm

For further technical details, please refer to 'INTERDEK Technical Data Sheet'.



INTERLINE (B) SDN. BHD.

YOUR LOCAL DISTRIBUTOR

Lot 56, 57, 58 & 59, Beribi Industrial Complex II, Gadong BE1118
Gadong P. O. Box 520, Bandar Seri Begawan BE3978, Negara Brunei Darussalam
Tel No. 673-2-448721 - 4 Fax No. 673-2-448725
E-mail: info@interline-asia.com Website: www.interline-asia.com